

2MP Mini Fixed Bullet Network Camera

IPC2122LB-SF28(36)(40)-A



Key Features




- High quality image with 2MP, 1/2.8"CMOS sensor
- 2MP (1920*1080)@ 30/25fps; 720P (1280*720)@ 30/25fps
- Ultra 265, H.265, H.264
- Smart IR, up to 30m (98ft) IR distance
- Day/night functionality
- 2D/3D DNR (Digital Noise Reduction)
- IP67 protection
- Support PoE power supply
- 3-Axis

Specifications

	IPC2122LB-SF28-A		IPC2122LB-SF36-A		IPC2122LB-SF40-A	
Camera						
Sensor	1/2.8", 2.0 megapixel, progressive scan, CMOS					
Minimum Illumination	Colour: 0.01Lux (F2.0, AGC ON) 0Lux with IR on					
Day/Night	IR-cut filter with auto switch (ICR)					
Shutter	Auto/Manual, 1 ~ 1/100000s					
Adjustment angle	Pan: 0° to 360°, Tilt: 0° to 90°, Rotate: 0° to 360°					
S/N	>52dB					
WDR	DWDR					
Lens						
Lens Type	2.8mm ,3.6mm and 4.0mm @1.6, Fixed-focal					
Lens Mount	M12					
Angle of View (H)	106.7°	86.4°			83.7°	
Angle of View (V)	57.1°	43.6°			44.6°	
Angle of View (O)	115.7°	112.3°			89.1°	
DORI						
DORI Distance	Lens (mm)	Detect (m)	Observe (m)		Recognize (m)	Identify (m)
	2.8	43.4	17.4		8.7	4.3
	4.0	62.1	24.8		12.4	6.2
Illuminator						
IR Range	Up to 30m (98ft) IR range					
Wavelength	850nm					
IR On/Off Control	Auto/Manual					
Video						
Video Compression	Ultra 265, H.265, H.264					
H.264 code profile	Baseline profile, Main profile, High profile					
Frame Rate	Main Stream: 1080P (1920*1080), Max 30fps; 720P (1280*720), Max 30fps; Sub Stream: D1 (720*576), Max 30fps; 640*360,Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps;					
Video Bit Rate	128 Kbps~6 Mbps					
OSD	Up to 4 OSDs					
Privacy Mask	Up to 4 areas					
ROI	Up to 8 areas					
Motion Detection	Up to 4 areas					
Image						
White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2					
Image Setting	Image rotation, brightness, saturation, contrast, sharpness, gain adjustable by web browser					
Digital noise reduction	2D/3D DNR					
Smart IR	Supported					
Flip	Normal/Vertical/Horizontal/180°					
Dewarping	N/A					
HLC	Supported					

BLC	Supported
Defog	Digital Defog
Network	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, UPnP, HTTP
Compatible Integration	API, SDK
User/Host	Up to 32 users. 2 user levels: administrator and common user
Security	Password protection, Strong password, HTTPS encryption, Export operation logs, Basic and digest authentication for RTSP, Digest authentication for HTTP, TLS 1.2, WSSE and digest authentication for ONVIF
Client	EZStation EZView EZLive
Web Browser	Plug-in free live view: Chrome 57.0+, Firefox 58.0+, Edge 16+
Interface	
Network	1 * RJ45 10M/100M Base-TX Ethernet
Certification	
EMC	FCC: FCC Part 15
Safety	CE: EN 60950-1 UL: UL60950-1 IEC 60950-1
General	
Power	DC 12V±25%, PoE (IEEE 802.3af)
	Power consumption: Max 5.5W
Power Interface	Ø 5.5mm coaxial power plug
Dimensions (L × W × H)	161 × 63 × 62mm (6.4" × 2.5" × 2.4")
Weight	0.27kg (0.60lb)
Material	Metal + Plastic
Working Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Storage Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Surge Protection	4KV
Reset Button	N/A
Ingress Protection	Ingression protection: IP67

Dimensions

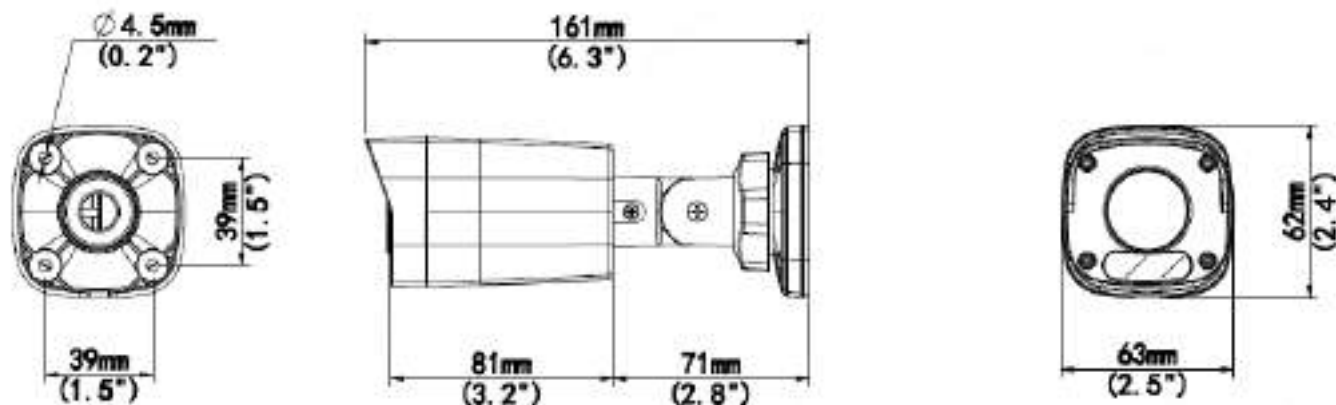

Accessories

TR-UP06-B-IN



TR-JB05-A-IN



TR-UP06-C-IN



TR-A01-IN



Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China (310051)

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2020 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.