

CW-TLC-360


360° Ceiling Mount PIR Detector

- Digital Microwave Signal Processing
- Unique Hard Shell Spherical Lens
- 360° / 14m Diameter Coverage when Mounted at 3.6m
- Complete Range Adjustment
- ASIC Based Technology
- Fully Sealed Optical Chamber
- Extra-Wide Rear Wiring Channel



SPECIFICATION

	TLC-360	SRX-360
Detection method	Dual Element PIR	4 element PIR & MW pulse Doppler MW X-Band 10.525GHz / 10.687GHz
Alarm period	1.6 sec (± 0.5 sec)	2 sec (± 1 sec)
Led indicators	Yellow LED is blinking during warm up period and self-testing Red LED is ON during alarm	Yellow LED is blinking during warm up period and self-testing Red LED is ON during alarm Red LED: UNIT ALARM Green LED: PIR CHANNEL Yellow LED: MW CHANNEL
Warm up period	60 sec (± 5 sec)	
Alarm output	N.C 28VDC 0.1 A with 10 Ohm series protection resistor	
Tamper Switch	N.C 28VDC 0.1A with 10 Ohm series protection resistor open when cover is removed	
Operating voltage	9.6 to 16VDC	
Current draw	Active: 10 mA ($\pm 5\%$) Standby: 9 mA ($\pm 5\%$)	Active : 25.5 mA Standby: 16.5 mA
RFI protection	30V/m 10 - 1000MHz	
EMI protection	50,000V of electrical interference from lightning or power through	
Installation height	3.6m up to 8m with optional HC Lens	
Temperature compensation	Yes	
Operating temperature	-10°C to +55°C	-20°C to +50°C
Dimensions	110mm x 45mm	131mm x 57mm
Weight	123 gr	185 gr

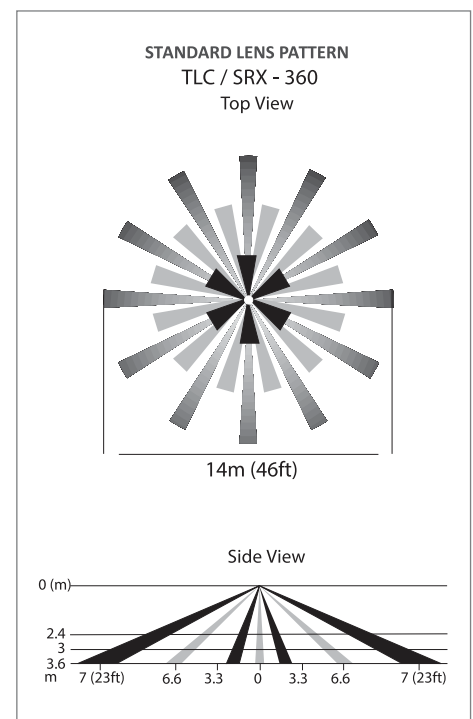

INFORMACIÓN Y VENTAS:

info@rigotech.com
www.rigotech.com



+593 987592573

